



Huggins Street Road Reconstruction

Between Marlborough Place and Portage Road



Presented by:

Urban & Environmental Management Inc.

February 9th, 2026

Project Overview

- The Huggins Area subdivision has been identified by the City for sewer separation. This will involve decommissioning the existing combined sewer and installing new dedicated storm and sanitary sewers. Due to the size of the project area, both design and construction will be implemented in phases.
- Phase 1 of the project is Huggins Street, East of Marlborough Place to Portage Road, including crossing Portage Road to the west end of Coholan Street to tie-in to the existing storm sewer manhole. This phase is referred to as Huggins East.
- The project components include the installation of a new storm sewer, replacement watermain, road reconstruction including curbs and gutters, as well as a new pedestrian crosswalk adjacent to the A N Myer parking lot.


Project Area




Infrastructure Overview



- Proposed New Storm Sewer and Watermain Replacement

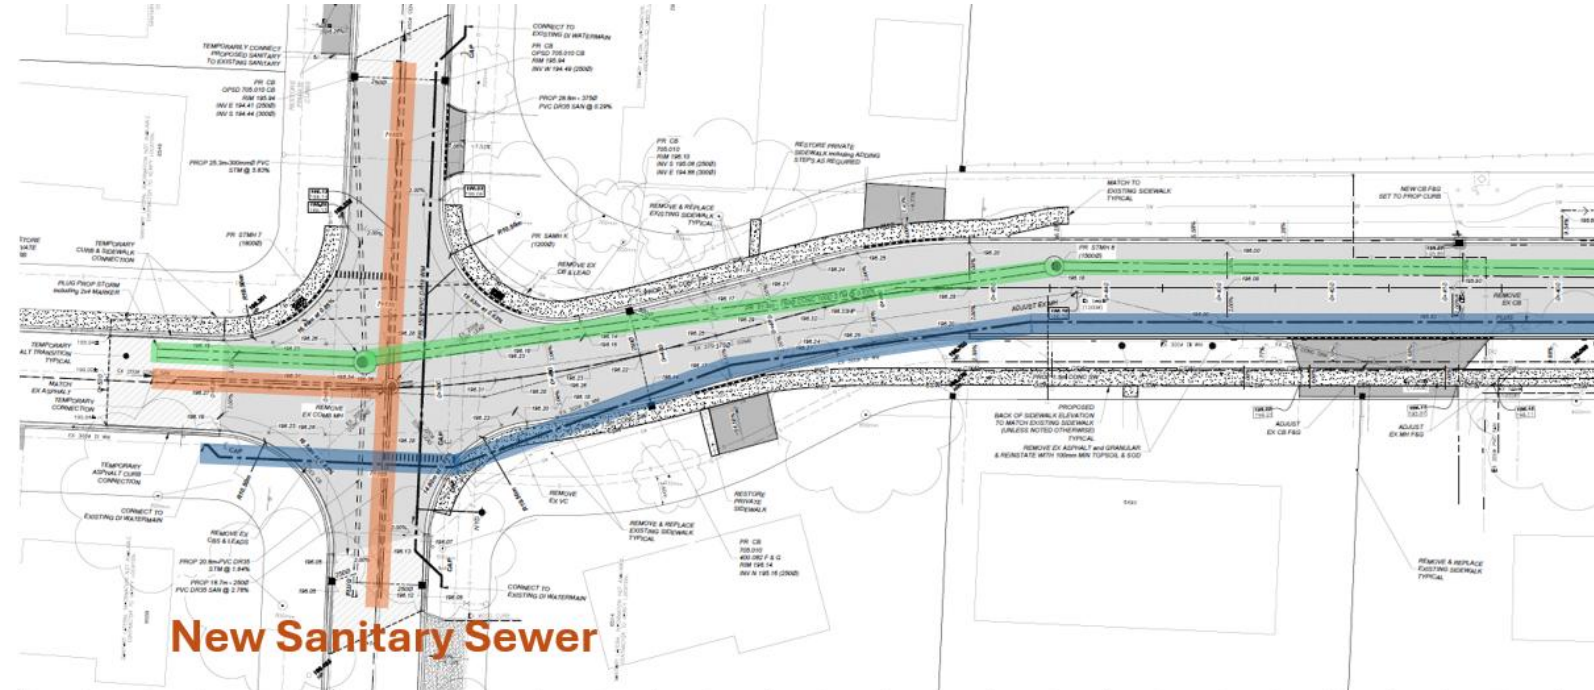


New Storm Sewer
Replacement Watermain

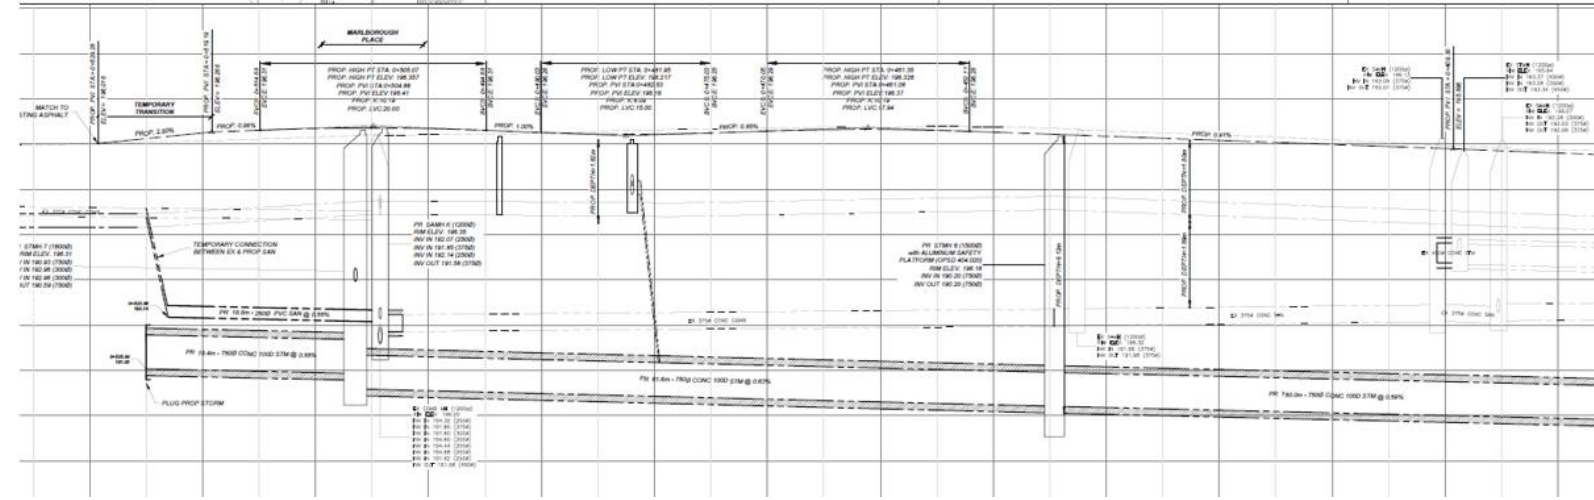

Infrastructure Overview




- Proposed New Storm Sewer and Watermain Replacement

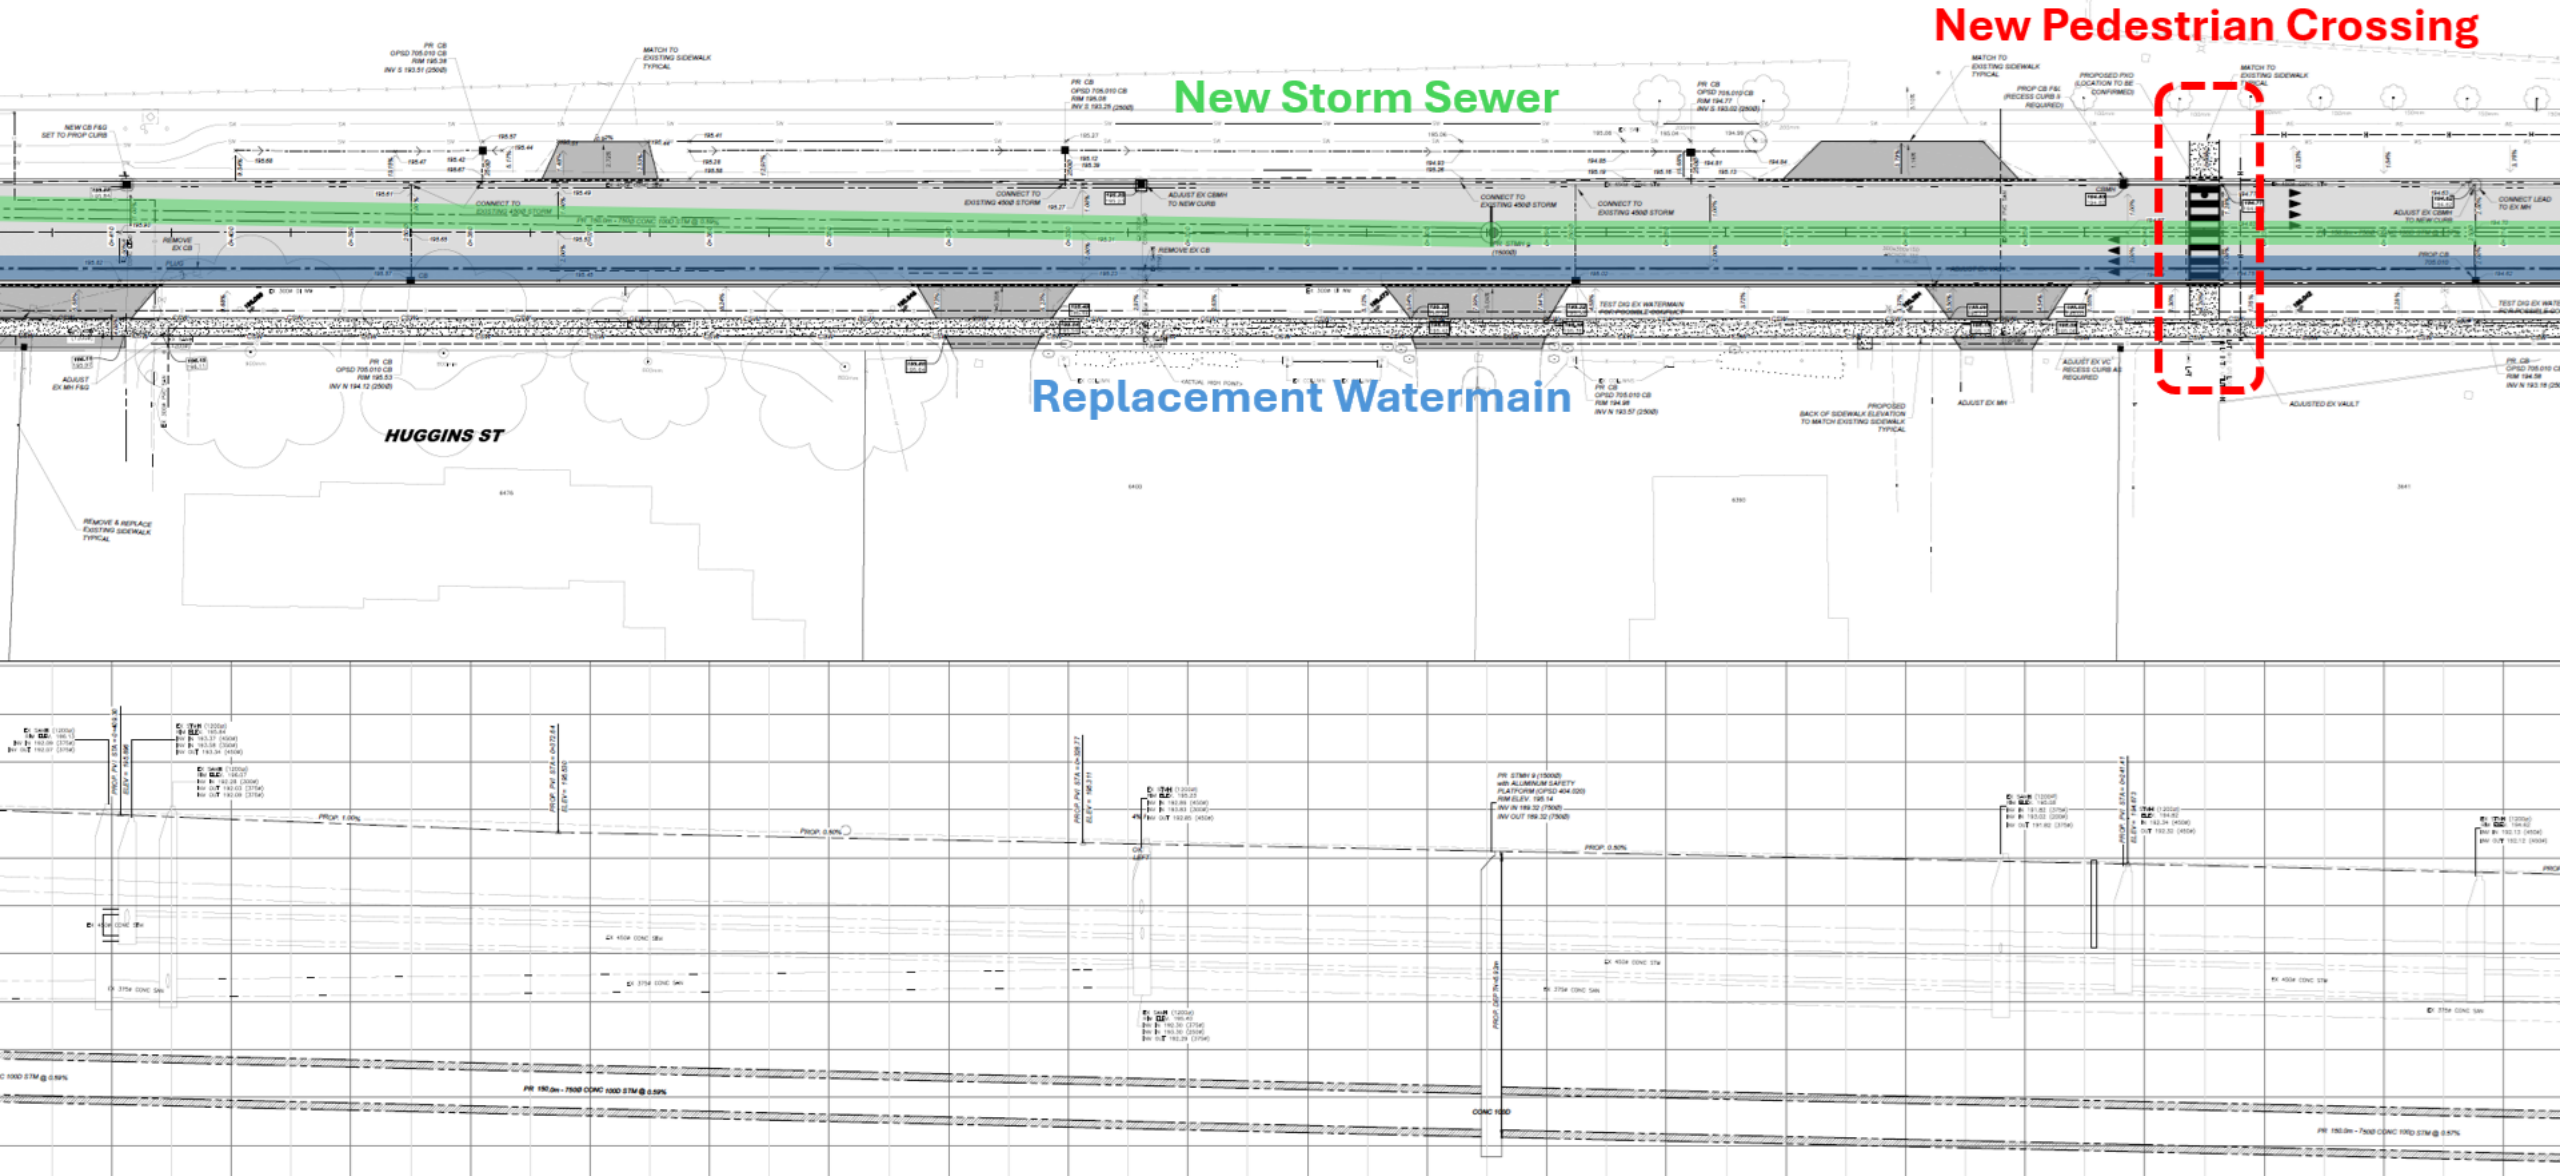

Infrastructure Overview

- Proposed New Storm Sewer and Watermain Replacement

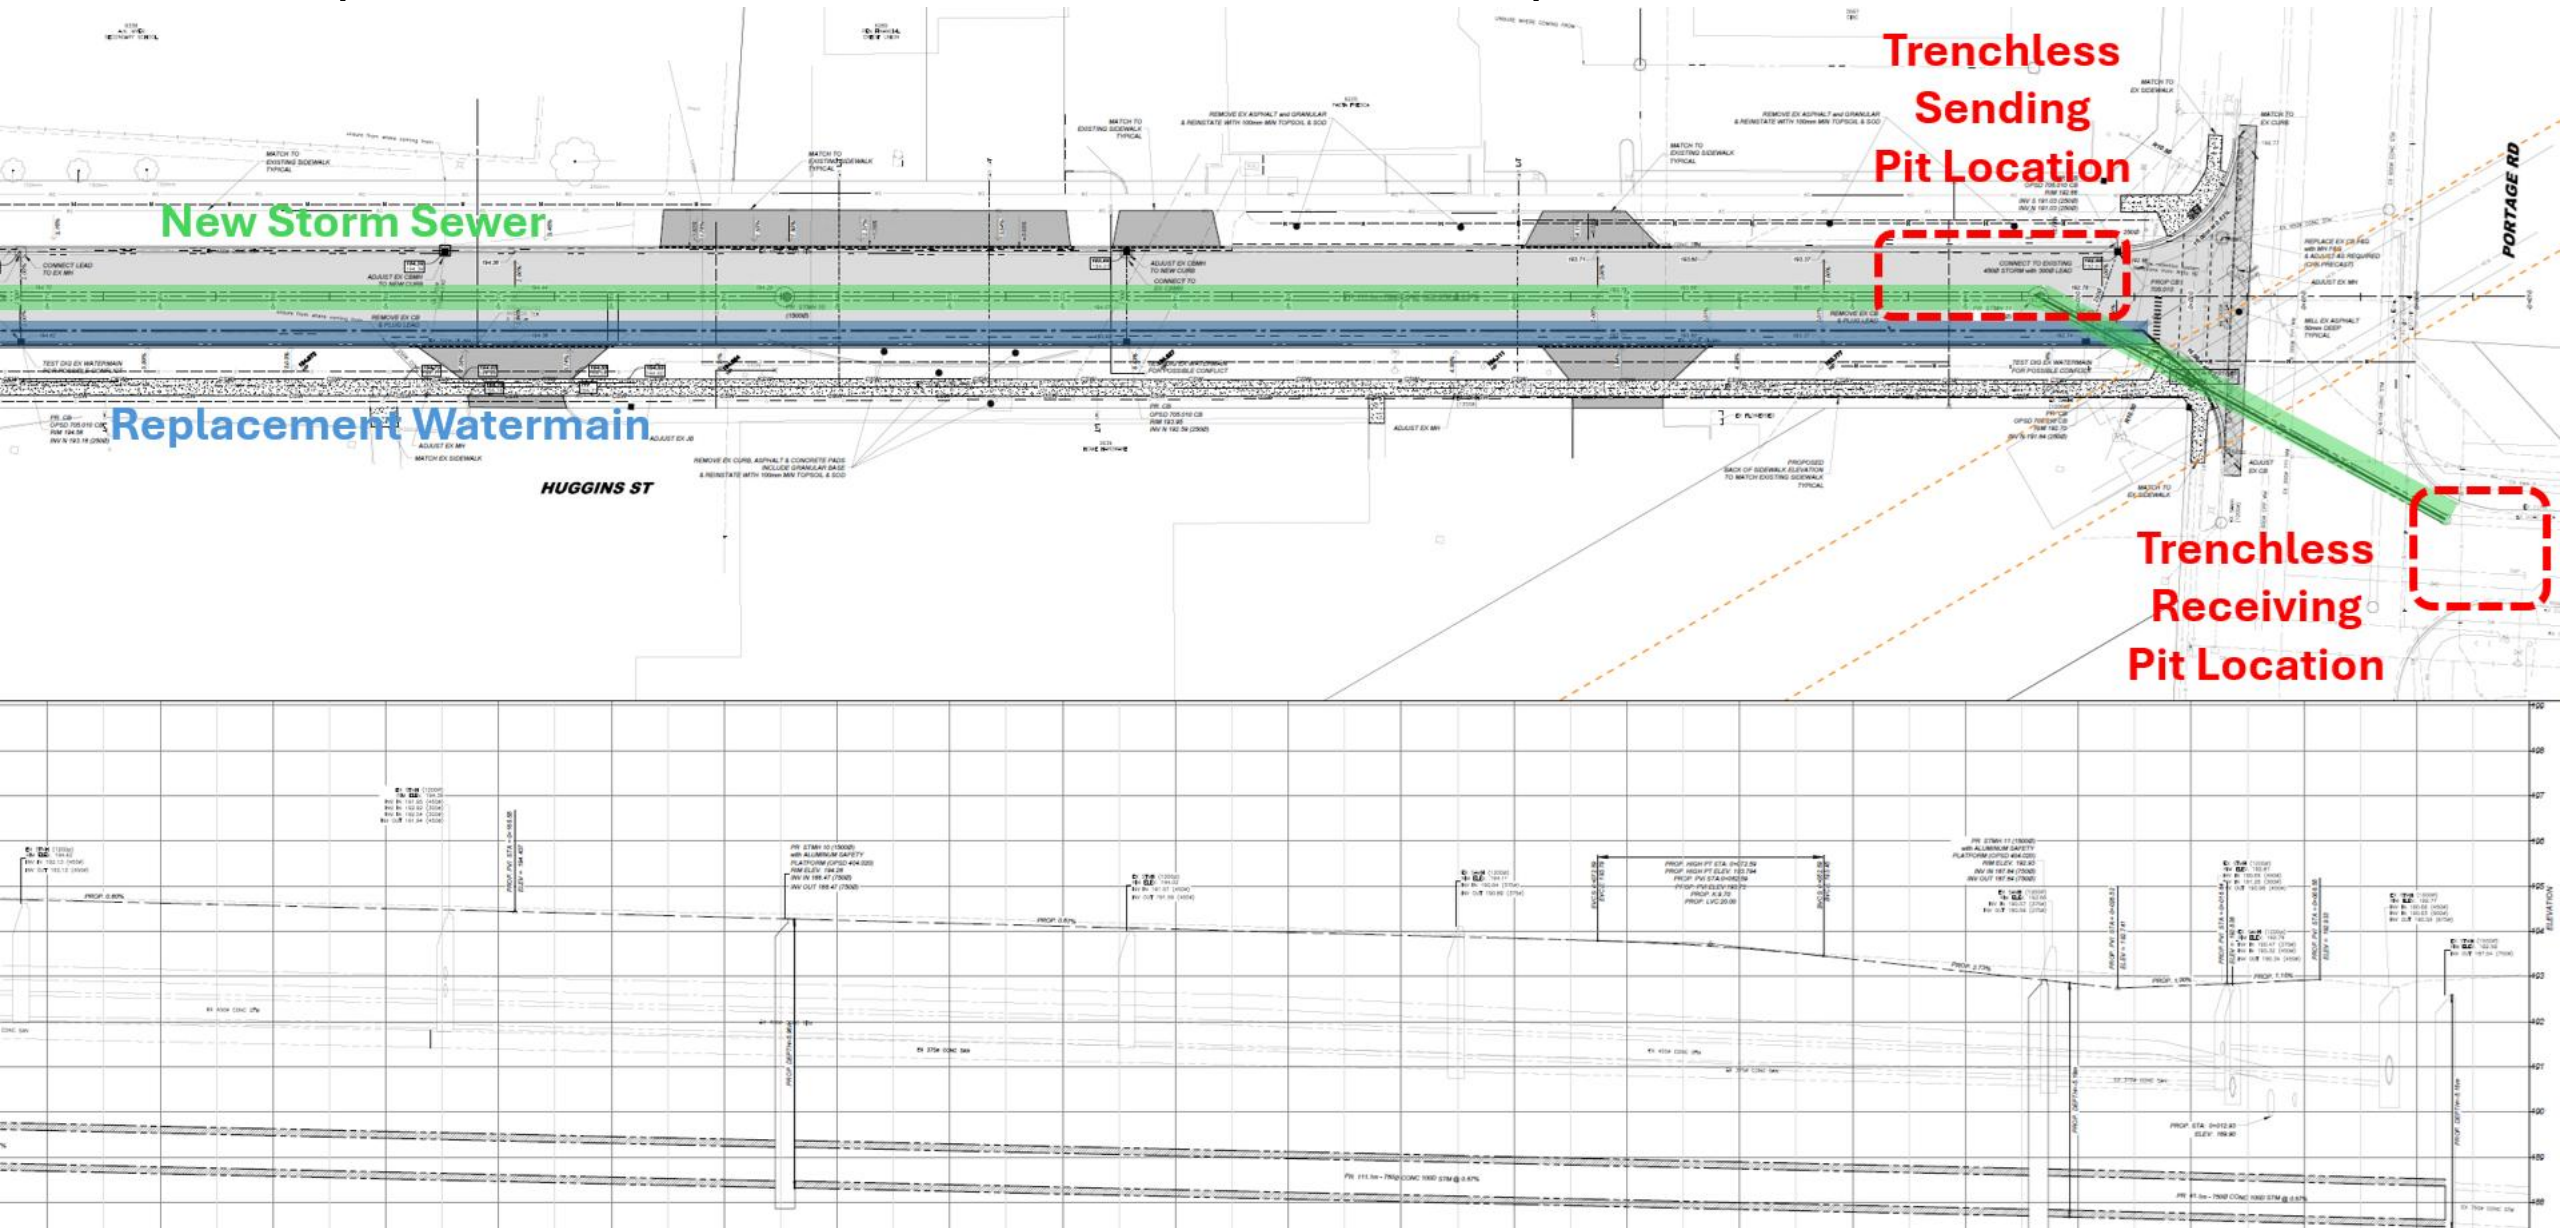

Construction Impacts

- Due to the depth of the new storm sewer, impact to traffic will be unavoidable.
- A Road Closure that limits traffic will be required. One lane for access to local traffic only will be maintained at all times but may be impeded by construction vehicles and equipment during the workday.
- The storm sewer crossing under Portage Road is proposed to be by trenchless installation methods. Meaning no closure of Portage Road is expected. However, the trenchless installation method will require a pit to be constructed on either side of Portage Road, requiring a closure at the west end of Coholan Street, and the east end of Huggins Street.

Schedule

Phase 1 – Huggins Street East:

- The design will be completed in February 2026.
- Tender for construction will be posted in March 2026.
- Construction is anticipated to take place from Spring 2026 to Fall 2026.

Future Phases:

- The design is ongoing.
- Construction is projected to take place in 2027, however the limits are to be determined.